



**DW-40L298J/418D/528D**



Environmental Protection



Superior Uniformity



HC Energy-saving

# **-40°C**

# **Biomedical**

# **Freezer**

## **Scope of Application**

Suitable for the storage of plasma, biological material, reagents and other essential items. Used within hospitals, disease prevention, academia and commercial laboratories.

## **Innovative Design**

- Low noise
- Environmentally-friendly
- Superior uniformity
- Energy saving hydrocarbon technology
- Multiple alarms ensure the safety of the stored samples
- Adjustable shelves to facilitate and customize storage space

**Qingdao Haier Biomedical Co.,Ltd.**

No.280 Feng Yuan Road, High-tech Zone,  
Qingdao, 266109, P.R. China  
E-mail: [inquiry@haierbiomedical.com](mailto:inquiry@haierbiomedical.com)  
Website: [www.haiermedical.com](http://www.haiermedical.com)



Haier Biomedical  
International



Haier Biomedical  
International



@haiermedicalint



Haier Biomedical  
International



Haier Biomedical  
International

## Product Advantages



### HC energy-saving

High efficiency hydrocarbon compressor and refrigeration technology for a lower energy consumption



### Environmental protection

Hydrocarbon refrigerant, LBA foam polyurethane insulation layer



### Superior uniformity

With the optimized system design, the temperature uniformity of the characteristic point is  $\pm 3^{\circ}\text{C}$ , and the uniformity of the whole temperature zone is controlled within  $\pm 5^{\circ}\text{C}$



### Adjustable shelves

Built-in evaporator and adjustable shelves provides large available interior space. Users can store items of different sizes as needed

## Ergonomic Design



### Low noise

Optimized hydrocarbon system and structure noise reduction design ensures low noise output and quieter operation



### Complete configuration

Optional USB interface, chart recorder, RS485, stainless steel shelf, plastic drawer and plastic basket



### Multiple alarms

Including high/low temperature alarm, sensor error alarm, power failure alarm, door ajar alarm, high ambient temperature alarm, low battery alarm  
Alarm mode: Audible/visual and remote alarm



### Microcomputer control

Microcomputer electronic temperature controller, LED digital display, display precision is  $0.1^{\circ}\text{C}$ , the adjustable temperature range is  $-20^{\circ}\text{C}$  to  $-40^{\circ}\text{C}$



DW-40L298J



DW-40L418D



DW-40L528D

## Product Parts

### Control Panel

Microcomputer electronic temperature controller, LED digital display, display precision is 0.1°C

### Porthole

Equipped with two standard portholes (inner diameter 25mm) on the left and right sides of the freezer, convenient for users to conduct independent testing

### Adjustable Shelves

The adjustable shelves ensure the maximum usage efficiency of the internal space, and users can store items of different sizes as needed

### Feet and Casters

4 back-and-forth casters and 2 adjustable feet for easy moving and leveling

### Safety Lock

Mechanical lock and lock catch, separate key for the two standard mechanical locks and the lock catch allows the users equip the padlock if necessary. Secure and safe storage, convenient for multiple users

### USB Interface (Optional)

Enables users to download historical temperature data

### Chart Temperature Recorder (Optional)


Logs temperature over a 7-day period and tracks trends in real-time, hard copies can be retained for compliance




**DW-40L528D**

## Cabinet Temperature


**DW-40L298J Typical Performance Characteristics at 25°C ambient**

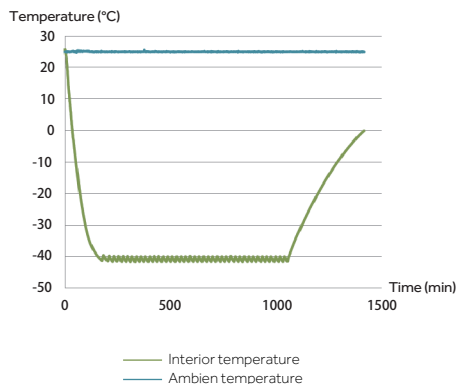


**DW-40L418D Typical Performance Characteristics at 25°C ambient**

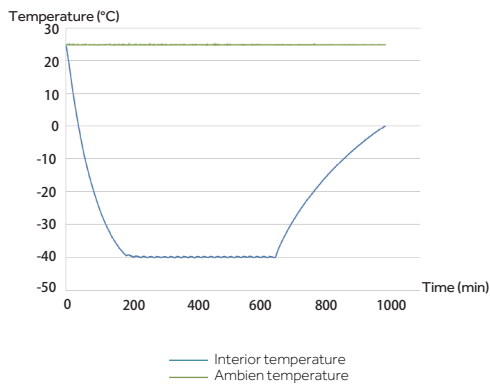


**DW-40L528D Typical Performance Characteristics at 25°C ambient**

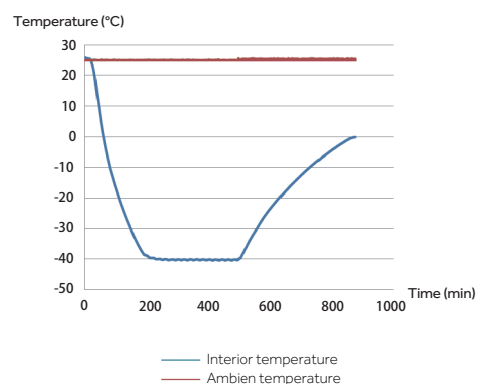

## Product Dimensions

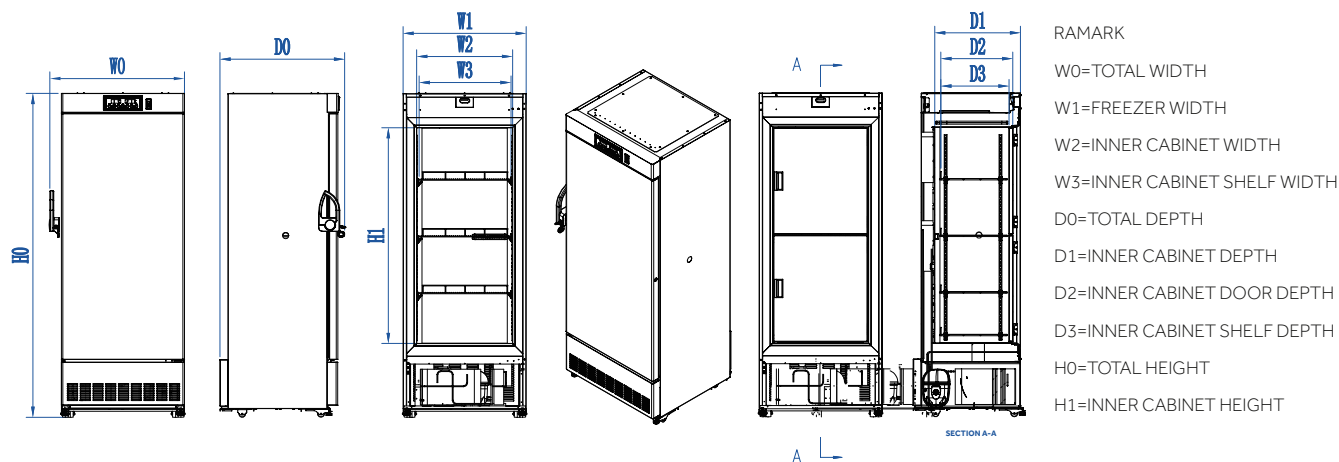

MODEL	CODE (mm)									
	W0	W1	W2	W3	D0	D1	D2	D3	H0	H1
DW-40L298J	770	695	541	518	710	484	443	384	1828	1218

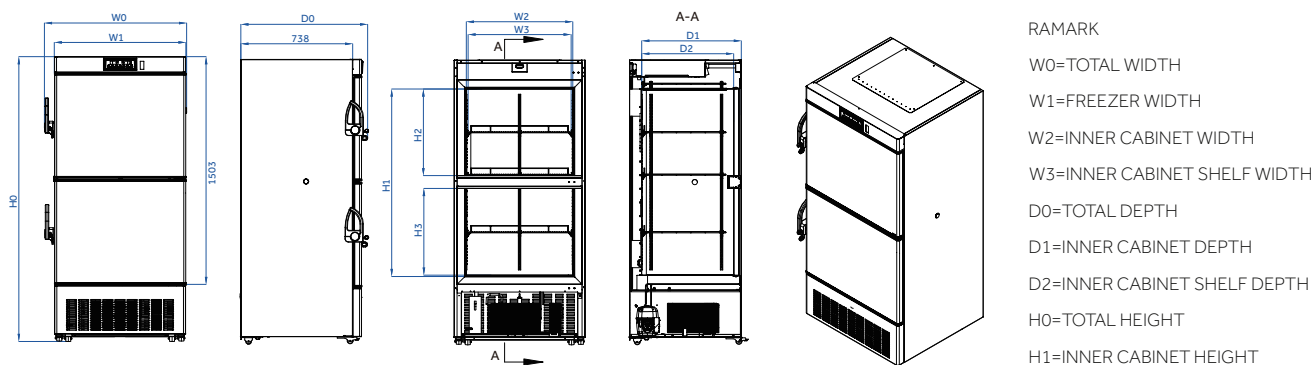

MODEL	CODE (mm)										
	W0	W1	W2	W3	H0	H1	H2	H3	D0	D1	D2
DW-40L528D	940	865	704	680	1878	1230	572	572	845	657	620
DW-40L418D	790	715	554	550	1878	1230	572	572	845	657	620

\*Haier Biomedical reserves the right to change products and specifications without prior notice.

## Specifications



	Model		DW-40L298J	DW-40L298JA	DW-40L418D	DW-40L528D	DW-40L528DA
Technical Data	Cabinet Type		Upright		Upright	Upright	
	Climate Class		SN N		SN N	SN N	
	Cooling Type		Direct Cooling		Direct Cooling	Direct Cooling	
	Defrost Mode		Manual		Manual	Manual	
	Refrigerant		HC		HC	HC	
	Sound Level (dB(A))		40	41	40	39	41
Performance	Cooling Performance (°C)		-40		-40	-40	
	Temperature Range (°C)		-20~-40		-20~-40	-20~-40	
Control	Controller		Microprocessor		Microprocessor	Microprocessor	
	Display		LED		LED	LED	
Electrical Data	Power Supply (V/Hz)		220~240/50	208~230/60	220~240/50	220~240/50	208~230/60
	Electrical Current (A)		3.3	2	2.9	2.9	2.6
Dimensions	Capacity (L/Cu.Ft)		298/10.5		418/14.8	531/18.8	
	Net/Gross Weight (approx)	(kg)	125/140		145/165	180/205	
		(lbs)	275.6/308.6		319.7/363.8	396.8/451.9	
	Interior Dimension (W*D*H)	(mm)	541*443*1218		554*620*1230	704*620*1230	
		(in)	21.3*17.4*48.0		21.8*24.4*48.4	27.7*24.4*48.4	
	Exterior Dimension (W*D*H)	(mm)	770*710*1828		790*845*1878	940*845*1878	
		(in)	30.3*28.0*72.0		31.1*33.3*73.9	37.0*33.3*73.9	
	Packing Dimension (W*D*H)	(mm)	840*770*2000		860*930*2040	1005*940*2040	
		(in)	33.0*30.3*78.7		33.9*36.6*80.3	39.6*37.0*80.3	
Alarms	Container Load (20'/40'/40'H)		21/42/42		12/24/26	10/22/24	
	High/Low Temperature		Y		Y	Y	
	Remote Alarm		Y		Y	Y	
	Power Failure		Y		Y	Y	
	Sensor Error		Y		Y	Y	
	Low Battery		Y		Y	Y	
	High Ambient Temperature		Y		Y	Y	
	Dirty Condenser		N		N	N	
	Door Ajar		Y		Y	Y	
Accessories	Castor		Y		Y	Y	
	Leveling Feet		Y		Y	Y	
	Porthole		Y		Y	Y	
	Drawers/Inner Doors		Optional/2		Optional/N	Optional/N	
	Adjustable Shelves		Y (3)		Y (3)	Y (3)	
	USB Interface		Optional		Optional	Optional	
	RS485		Optional		Optional	Optional	
	NFC		N		N	N	
	Temperature Recorder		Optional		Optional	Optional	
Others	Certificate		CE	CE	CE	CE	CE

\*Haier Biomedical reserves the right to change products and specifications without prior notice.